


# Cable Accessories

## KSS Natural Cable Ties

- Material: UL approved Nylon 66, 94V-2, with good tensile strength and insulation.

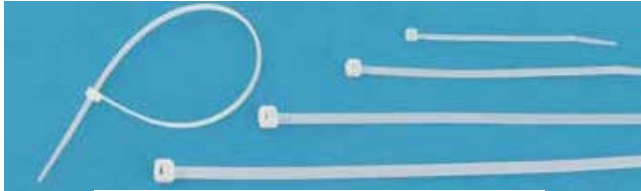

Part Number	Length L (mm)	Width W (mm)	Maximum Bundle Dia (mm)	Min Loop Tensile Strength (kgs)	Pack Qty (ea)	Carton Qty (packs)
CV100NAT	100	2.5	22	8.0	100	600
CV100KNAT	100	2.5	22	8.0	1000	70
CV140KNAT	142	3.2	34	18	1000	30
CV150NAT	150	3.6	36	18	100	230
CV200MNAT	203	2.5	55	8.0	100	280
CV200NAT	203	4.6	52	22	100	130
CV200KNAT	203	4.6	52	22	1000	16
CV250NAT	250	4.8	68	22	100	120
CV300SNAT	300	4.8	83	22	100	100
CV300NAT	300	7.6	80	55	100	50
CV300SKNAT	300	4.8	83	22	1000	10
CV368NAT	368	4.8	105	22	100	90
CV368KNAT	368	4.8	105	22	1000	9
CV380NAT	380	7.6	105	55	100	45
CV550NAT	550	8.0	160	55	100	25
CV1168NAT	1168	9.0	356	80	100	14

## KSS Weather Proof Cable Ties (Black)

- Carbo A was added for greater resistance to ultra violet rays in outdoor usage.



Part Number	Length L (mm)	Width W (mm)	Maximum Bundle Diameter (mm)	Min Loop Tensile Strength (Kgs)	Pack Qty (ea)	Carton Qty (packs)
CV100W	100	2.5	22	8.0	100	600
CV120LW	120	4.8	27	22	100	200
CV140W	142	3.2	34	18	100	250
CV140KW	142	3.2	34	18	1000	30
CV150W	150	3.6	36	18	100	230
CV200MW	203	2.5	55	8.0	100	280
CV200SW	203	3.2	53	18	100	220
CV200W	203	4.6	52	22	100	130

## Weather Proof Cable Ties (Black) Continued

Part Number	Length (mm) L	Width (mm) W	Maximum Bundle Diameter (mm)	Min Loop Tensile Strength (Kgs)	Pack Qty (ea)	Carton Qty (packs)
CV200KW	203	4.6	52	22	1000	16
CV200LW	203	7.6	52	55	100	75
CV250W	250	4.8	68	22	100	120
CV280XLW	280	12.7	74	114	100	30
CV292W	292	3.6	82	18	100	150
CV292KW	292	3.6	82	18	1000	15
CV300SW	300	4.8	83	22	100	100
CV300SKW	300	4.8	83	22	1000	10
CV300W	300	7.6	80	55	100	50
CV368W	368	4.8	105	22	100	90
CV368KW	368	4.8	105	22	1000	9
CV380W	380	7.6	105	55	100	45
CV450MW	450	4.8	131	22	100	80
CV450W	450	8.0	128	55	100	35
CV550W	550	8.0	160	55	100	25
CV550LW	550	12.7	159	114	100	16
CV762W	762	9.0	227	80	100	10
CV812W	812	9.0	243	80	100	10
CV1168W	1168	9.0	356	80	100	14

## KSS Colour Cable Ties

- Material: UL approved Nylon 66, 94V-2, with good tensile strength and insulation.



### Colour Cable Ties Key

Blue (BL)	Pink (PNK)	Yellow (Y)	Fluro Light Green (FLG)	Fluro Orange (FOR)
Green (G)	Purple (PU)	Orange (OR)	Fluro Pink (FPNK)	Black (W) Weather Resistant
Grey (GRY)	Red (R)	Fluro Yellow (FY)	Fluro Dark Green (FDG)	Natural (NAT)

Part Number	Length (mm) L	Width (mm) W	Maximum Bundle Diameter (mm)	Min Loop Tensile Strength (Kgs)	Pack Qty (ea)	Carton Qty (packs)
CV100BL	100	2.5	22	8.0	100	600
CV100G						
CV100GRY						
CV100PNK						
CV100PU						
CV100R						
CV100Y						
CV100OR						
CV100FY						
CV100FPNK						
CV100FDG						
CV100FOR						
CV150BL	150	3.6	36	18	100	230
CV150G						
CV150GRY						
CV150PNK						
CV150W						

Colour Cable Ties continue next page.

# Cable Accessories

## Colour Cable Ties Continued

Part Number	Length (mm) L	Width (mm) W	Maximum Bundle Diameter (mm)	Min Loop Tensile Strength (Kgs)	Pack Qty (ea)	Carton Qty (packs)						
CV150PU	150	3.6	36	18	100	230						
CV150R												
CV150Y												
CV150OR												
CV150FY												
CV150FLG												
CV150FPNK												
CV150FDG												
CV150FOR												
CV200BL							203	4.6	52	22	100	130
CV200G												
CV200GRY												
CV200PNK												
CV200PU												
CV200R												
CV200Y												
CV200OR												
CV200FY												
CV200FLG												
CV200FPNK												
CV200FDG												
CV200FOR												
CV300SBL	300	4.8	83	22	100	100						
CV300SG												
CV300SPU												
CV300SR												
CV300SY												
CV300SOR												
CV300SFY												

### CABLE TIE ASSORTED PACK

PART NUMBER: BP-850

#### CONTENTS:

- CV-100W - 100pcs
- CV-100 RD, YW, BL, G - 400pcs (100PCS EA)
- CV-200W - 300pcs
- CV-280W - 50pcs



### KSS Releasable Cable Ties

- Material: UL approved Nylon 66, 94V-2
- Finger catch design to release cable tie locking



Part Number	Length (mm) L	Width (mm) W	Maximum Bundle Dia. (mm)	Min Loop Tensile Strength (Kgs)	Pack Qty
Black					
CVREL200	200	4.6	55	22	100
CVREL300	300	4.8	88	22	100

### KSS Mounting Cable Tie


- Material: UL approved Nylon 66, 94V-2, with good tensile strength and insulation.
- The cable tie can be secured to a panel with a single bolt.



Part Number	Length (mm) L	Width (mm) W	Stud Size (mm) A	Maximum Bundle Dia. (mm)	Min Loop Tensile Strength (Kgs)	Pack Qty
Natural						
TCV100	110	2.5	3.2	25	8.0	100
TCV205	219	4.2	5.5	52	22	100
TCV400	400	7.9	6.0	112	55	100
Black						
TCV205W	219	4.2	5.5	52	22	100
TCV300W	300	4.8	4.8	85	22	100

### KSS Marker Ties

- Material: UL approved Nylon 66, 94V-2, with good tensile strength and insulation.
- Flat areas may be imprinted or written on with a marking pen.

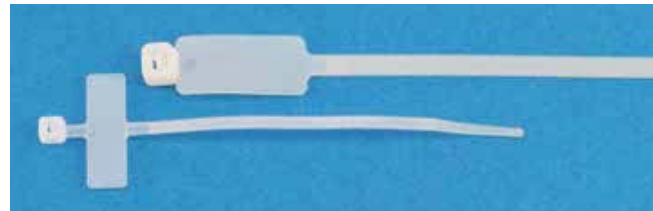

Part Number	Length (mm) L	Width (mm) W	Maximum Bundle Dia. (mm)	Min Loop Tensile Strength (Kgs)	Marking pad A X B	Pack Qty
Natural						
MCV100	100	2.5	23	8.0	8 X 25	100
MCV200	200	4.6	50	22	28 X 13	100

### KSS In-line Cable Ties

- Material: UL approved Nylon 66, 94V-2.
- Flat head low profile design to be used with playground equipment to prevent harming playing children.



Part Number	Length (mm) L	Width (mm) W	Maximum Bundle Diameter (mm)	Min Loop Tensile Strength (Kgs)	Pack Qty
FCV391BE	391	9.0	117	25	100
FCV391Y					
FCV391R					